

# 1SSA32


## Coax armoured tow cable



### CONSTRUCTION DETAILS

#### 1 X COAX 39 OHM:

- ~ Bare copper conductor 7x0,40 mm
- ~ XLPE insulation
- ~ Bare copper spiral shield 14 AWG (1,94 mm<sup>2</sup>), nominal coverage 90 %
- ~ XLPE sheath
- ~ 1st layer of preformed galvanized steel wire armour
- ~ 2nd layer of preformed galvanized steel wire armour
- ~ Nominal overall diameter 8,20 mm

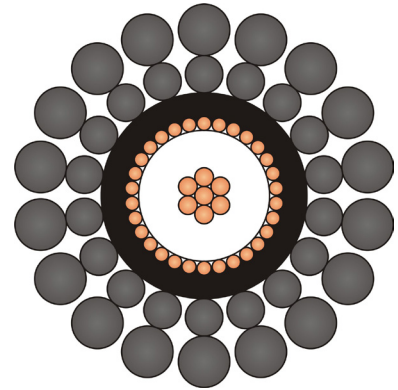

### ELECTRICAL AND PHYSICAL CHARACTERISTICS

~ Resistance of inner conductor	Max 23,0 ohm/km
~ ~ Resistance of outer conductor	Max 10,5 ohm/km
~ ~ Voltage rating	Max 1200 Vdc
~ ~ Weight in air nom.	260 kg/km
~ ~ Weight in fresh water nom.	194 kg/km
~ ~ Weight in sea water nom. (s.g. 1,026)	193 kg/km
~ ~ Breaking strength	42,7 kN
~ ~ Working load max.	17,1 kN
~ ~ Recommended static bending radius min.	90 mm
~ ~ Recommended dynamic bending radius min.	180 mm
~ ~ Working temperature	-30/+90 °C
~ ~ Characteristics Impedance @ 1 MHz	39 ohm
~ ~ Nominal capacitance	131 pF/m

### KEY FEATURES

- ~ Preformed armour
- ~ Tow cable
- ~ Coaxial cable

**AQUANCABLE®**

