

# 1SSA41


## Armoured tow cable



### CONSTRUCTION DETAILS

#### 1 X 14 AWG:

- ~ Bare copper conductor 19x0,36 mm
- ~ XLPE insulation
- ~ 1st layer of preformed galvanized steel wire armour
- ~ 2nd layer of preformed galvanized steel wire armour
- ~ Nominal overall diameter 9,50 mm

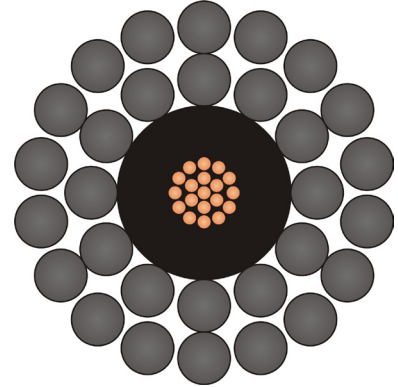

### ELECTRICAL AND PHYSICAL CHARACTERISTICS

~ Electrical resistance conductors 14 AWG	< 9,50 ohm/km @ 20°C
~ Voltage rating	2000 V
~ Weight in air nom.	366 kg/km
~ Breaking strength	65 kN
~ Working load max.	16 kN
~ Recommended bending radius min.	255 mm
~ Working temperature	-30/+105°C

### KEY FEATURES

- ~ Preformed armour
- ~ Tow cable

**AQUANCABLE®**

