

4SSA40


4 Conductors tow cable



CONSTRUCTION DETAILS

4 X 24 AWG:

- ~ Bare copper conductor 7x0,20 mm
- ~ ETFE insulation
- ~ Conductors laid up together
- ~ PET-E sheath
- ~ 1st layer of preformed galvanized steel wire armour
- ~ 2nd layer of preformed galvanized steel wire armour
- ~ Nominal overall diameter 4,75 mm

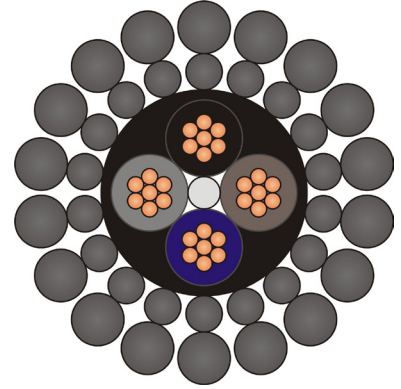

ELECTRICAL AND PHYSICAL CHARACTERISTICS

~ Electrical resistance conductors 24 AWG	< 85,30 ohm/km @ 20°C
~ Voltage rating	400 Vdc
~ Weight in air nom.	90 kg/km
~ Weight in fresh water nom.	72 kg/km
~ Weight in sea water nom. (s.g. 1,026)	71 kg/km
~ Breaking strength	14,7 kN
~ Working load max.	3,7 kN
~ Recommended bending radius min.	250 mm
~ Working temperature	-40/+150°C

KEY FEATURES

- ~ Preformed armour
- ~ Tow cable

AQUANCABLE®

Design and contents are property of Novacavi.
They are not to be used or reproduced without permission.
Product information is subject to change without prior notice.

