

6SSA5

Coax armoured tow cable



CONSTRUCTION DETAILS


3 X COAX 30 OHM:

- ~ Bare copper conductor 19x0,25 mm
- ~ PP insulation
- ~ Bare copper braid
- ~ PP sheath

3 X 22 AWG:

- ~ Bare copper conductor 19x0,16 mm
- ~ PP insulation

- ~ Elements laid up together
- ~ HDPE sheath
- ~ 1st layer of preformed galvanized steel wire armour
- ~ 2nd layer of preformed galvanized steel wire armour
- ~ Nominal overall diameter 12,70 mm

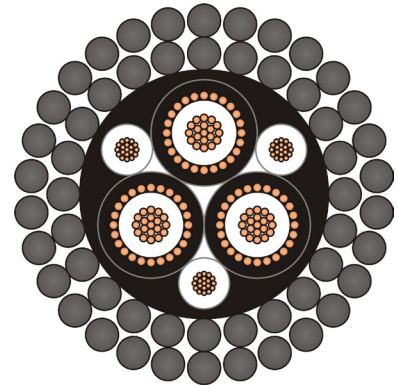

ELECTRICAL AND PHYSICAL CHARACTERISTICS

~ Electrical resistance coax conductors	< 23,60 ohm/km @ 20°C
~ Electrical resistance coax shields	< 12,50 ohm/km @ 20°C
~ Electrical resistance conductors 11 AWG	< 4,90 ohm/km @ 20°C
~ Voltage rating coax	1000 V
~ Voltage rating 11 AWG	750 V
~ Coax nominal capacitance	180 pF/m
~ Coax characteristic impedance @ 1 MHz	30 ohm
~ Weight in air nom.	1010 kg/km
~ Weight in fresh water nom.	774 kg/km
~ Weight in sea water nom. (s.g. 1,026)	767 kg/km
~ Breaking strength	89 kN
~ Working load max.	22 kN
~ Recommended bending radius min.	250 mm
~ Working temperature	-30/+90 °C

KEY FEATURES

- ~ Preformed armour
- ~ Tow cable
- ~ Hybrid cable
- ~ Coaxial cable

AQUANCABLE®

Design and contents are property of Novacavi.
They are not to be used or reproduced without permission.
Product information is subject to change without prior notice.

