

# 7SSA12


## 7 Cores tow cable



### CONSTRUCTION DETAILS

#### 7 X 22 AWG:

- ~ Tinned copper conductor
  - ~ Polypropylene insulation
  - ~ Protective polyester tape
  - ~ Hydrolysis resistant PUR outer sheath
  - ~ Preformed galvanised steel wire armour
- ~ Nominal overall diameter 8,95 mm

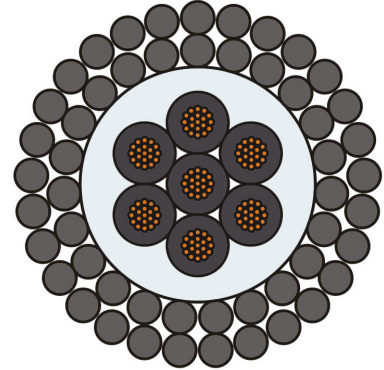

### ELECTRICAL AND PHYSICAL CHARACTERISTICS

~ Electrical resistance conductors 22 AWG	< 51,04 ohm/km @ 20°C
~ Working voltage	600 V dc
~ Weight in air nom.	265 kg/km
~ Weight in sea water nom. (s.g. 1,026)	210 kg/km
~ Recommended static bending radius min.	135 mm
~ Recommended dynamic bending radius min.	180 mm
~ Breaking strength	43 kN
~ Working load max.	11 kN
~ Working temperature	-40/+80°C

**AQUANCABLE®**

Design and contents are property of Novacavi.  
They are not to be used or reproduced without permission.  
Product information is subject to change without prior notice.

