

300MB27

Hydraulic umbilical cable



CONSTRUCTION DETAILS

1X Hydraulic hose 1/4":

~ Protective PTFE tape


1X Hydraulic hose 3/16":

~ Protective PTFE tape

1X Hydraulic hose 3/16":

~ Protective PTFE tape

- ~ Hoses laid up together with fillers
- ~ Protective polyester tape and non woven tape
- ~ Hydrolysis UV resistant PUR outer sheath, colour black
- ~ Nominal overall diameter 28,50 mm

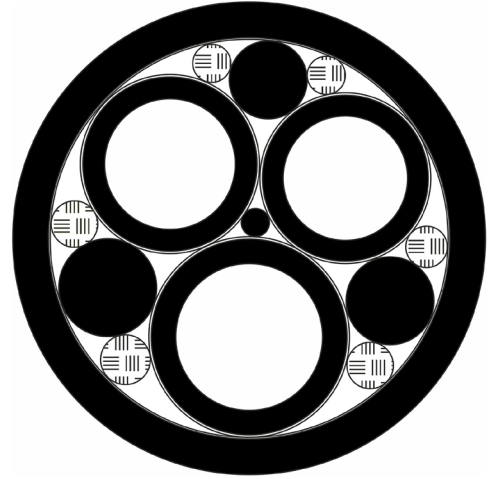

PHYSICAL CHARACTERISTICS

~ Hydraulic hose 1/4" working pressure	350 bar
~ Hydraulic hose 3/16" working pressure	350 bar
~ Hydraulic hose 3/16" working pressure	448 bar
~ Weight in air nom.	622 kg/km
~ Weight in fresh water nom.	-16 kg/km
~ Weight in sea water nom. (s.g. 1,026)	-32 kg/km
~ Recommended static bending radius min.	142 mm
~ Recommended dynamic bending radius min.	285 mm
~ Working temperature	-30/+80°C

AQUANCABLE®

Design and contents are property of Novacavi.
They are not to be used or reproduced without permission.
Product information is subject to change without prior notice.

