

# 3OMB26


## Hydraulic umbilical cable



### CONSTRUCTION DETAILS

#### 3X Hydraulic hoses 1":

- ~ PTFE tape
- ~ Hoses laid up together with fillers
- ~ PTFE tape
- ~ LDPE UVR sheath
- ~ Hydrolysis UV resistant PUR outer sheath, colour black
- ~ Nominal overall diameter 88,40 mm

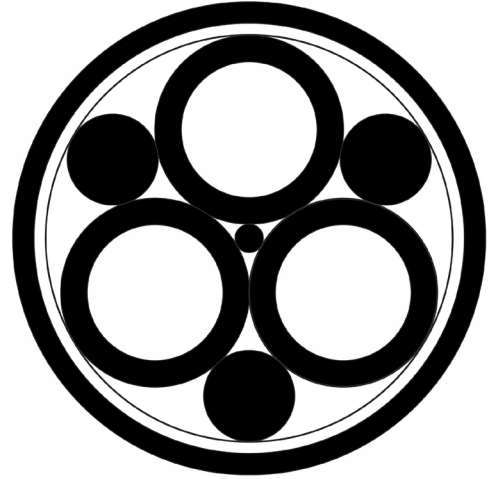

### PHYSICAL CHARACTERISTICS

- |                               |             |
|-------------------------------|-------------|
| ~ Weight in air               | 4482 kg/km  |
| ~ Weight in sea water         | -1655 kg/km |
| ~ Bending radius static min.  | 450 mm      |
| ~ Bending radius flexing min. | 900 mm      |
| ~ Working temperature         | -30/+80 °C  |

**AQUANCABLE®**

Design and contents are property of Novacavi.  
They are not to be used or reproduced without permission.  
Product information is subject to change without prior notice.

