

4OMB13


Hydraulic umbilical cable



CONSTRUCTION DETAILS

4X Hydraulic hoses 3/8":

- ~ Protective PTFE tape
- ~ Hoses laid up together with fillers
- ~ Hydrolysis UV resistant PUR sheath
- ~ Vectran fiber braid strength member
- ~ Hydrolysis UV resistant PUR outer sheath, colour black
- ~ Nominal overall diameter 56,50 mm

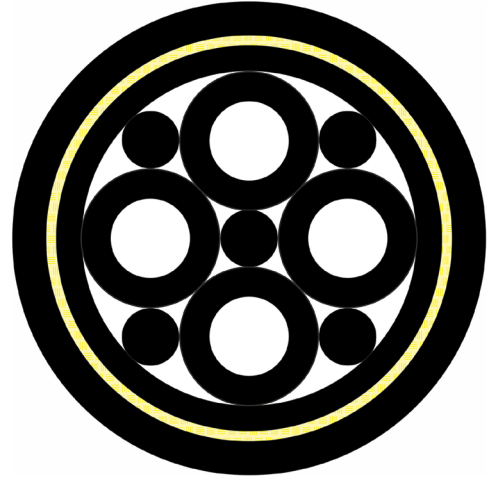

PHYSICAL CHARACTERISTICS

Empty hoses

- | | |
|---|-------------------------|
| ~ Weight in air nom. | 2260 kg/km |
| ~ Weight in sea water nom. (s.g. 1,026) | -270 kg/km |
| ~ Specific gravity nom. | 0,92 kg/dm ³ |

Oil filled hoses (oil s.g. 0,85)

- | | |
|---|-------------------------|
| ~ Weight in sea water nom. (s.g. 1,026) | -130 kg/km |
| ~ Specific gravity nom. | 0,97 kg/dm ³ |

- | | |
|---|-----------|
| ~ Breaking strength | 9000 daN |
| ~ Working load max. | 2250 daN |
| ~ Recommended static bending radius min. | 565 mm |
| ~ Recommended dynamic bending radius min. | 850 mm |
| ~ Working temperature | -30/+80°C |

AQUANCABLE®

