

7SSA12


7 Cores tow cable



CONSTRUCTION DETAILS

7 X 22 AWG:

- ~ Tinned copper conductor
 - ~ Polypropylene insulation
 - ~ Non woven tape
 - ~ Hydrolysis resistant PUR sheath
 - ~ Preformed galvanised steel wire armour
-
- ~ Nominal overall diameter 9,10 mm

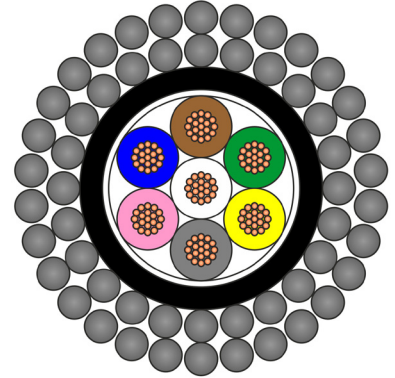

ELECTRICAL AND PHYSICAL CHARACTERISTICS

~ Electrical resistance conductors 22 AWG	< 51,04 ohm/km @ 20°C
~ Working voltage	600 V
~ Weight in air nom.	275 kg/km
~ Weight in fresh water nom.	210 kg/km
~ Weight in sea water nom. (s.g. 1,026)	208 kg/km
~ Recommended static bending radius min.	95 mm
~ Recommended dynamic bending radius min.	190 mm
~ Breaking strength	43 kN
~ Working load max.	11 kN
~ Working temperature	-30/+80°C

AQUANCABLE®

Design and contents are property of Novacavi.
They are not to be used or reproduced without permission.
Product information is subject to change without prior notice.

