

# 1SSA19


## Coax armoured tow cable



### CONSTRUCTION DETAILS

#### 1 X COAX 45 OHM:

- ~ Bare copper conductor 19x0,30 mm
- ~ PP insulation
- ~ Bare copper spiral shield 13 AWG (2,59 mm<sup>2</sup>), nominal coverage  $\geq 90\%$
- ~ Copper/polyester tape
- ~ PP sheath
- ~ 1st layer of preformed galvanized steel wire armour
- ~ 2nd layer of preformed galvanized steel wire armour
- ~ Nominal overall diameter 11,00 mm

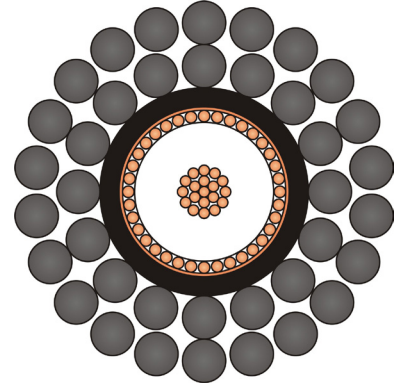

### ELECTRICAL AND PHYSICAL CHARACTERISTICS

~ Electrical resistance inner conductor	< 14,15 ohm/km @ 20°C
~ Resistance of outer conductor	< 7,6 ohm/km @ 20°C
~ Voltage rating	1500 V
~ Nominal capacitance	115 pF/m
~ Characteristic impedance @ 1 MHz	45 ohm
~ Nominal attenuation @ 1 MHz	< 12 dB/Km
~ Weight in air nom.	458 kg/km
~ Weight in fresh water nom.	363 kg/km
~ Weight in sea water nom. (s.g. 1,026)	361 kg/km
~ Breaking strength	85 kN
~ Working load max.	21,3 kN
~ Recommended dynamic bending radius min.	220 mm
~ Working temperature	-40/+80°C

### KEY FEATURES

- ~ Preformed armour
- ~ Tow cable
- ~ Coaxial cable

**AQUANCABLE®**

