

5SSA24

Hybrid coaxial armoured cable




CONSTRUCTION DETAILS

1 X COAX RG 11:

- ~ Tinned copper conductor
- ~ Polyethylene insulation
- ~ Bare copper braid shield
- ~ PVC outer sheath

4 X 2,50 mm²:

- ~ Bare copper conductor
- ~ Cross-linked polyethylene insulation
- ~ Hydrolysis UV resistant PUR outer sheath
- ~ 2 Layers contra-helical preformed galvanized steel wire armour
- ~ Nominal overall diameter 23,70 mm

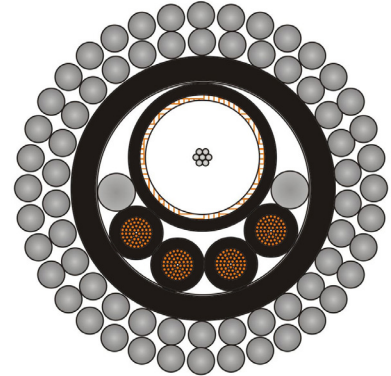

ELECTRICAL AND PHYSICAL CHARACTERISTICS

~ Electrical resistance conductors 2,50 mm ²	< 7,98 ohm/km @ 20°C
~ Working voltage 2,50 mm ²	0,6/1 kV
~ Coax inner conductor resistance	< 20,8 ohm/km @ 20°C
~ Coax outer conductor resistance	< 4,8 ohm/km @ 20°C
~ Coax capacitance	67 +/- 5 pF/m
~ Coax impedance	75 +/- 3 ohm
~ Weight in air nom.	1.646 kg/km
~ Weight in fresh water nom.	1205 kg/km
~ Weight in sea water nom. (s.g. 1,026)	1194 kg/km
~ Breaking strength	190 kN
~ Working load max.	48 kN
~ Recommended static bending radius min.	285 mm
~ Recommended dynamic bending radius min.	355 mm
~ Working temperature	-30/+80°C

AQUANCABLE®

