

1SSA4

Coax armoured tow cable




NOVACAVI

Cables for advanced technology

CONSTRUCTION DETAILS

1 X COAX 40 OHM:

- ~ Tinned copper conductor 19x0,36 mm
- ~ HDPE insulation
- ~ Bare copper spiral shield 12 AWG (3,22 mm²), nominal coverage 90 %
- ~ Copper/polyester tape
- ~ HDPE sheath
- ~ 1st layer of preformed galvanized steel wire armour
- ~ 2nd layer of preformed galvanized steel wire armour
- ~ Nominal overall diameter 11,50 mm

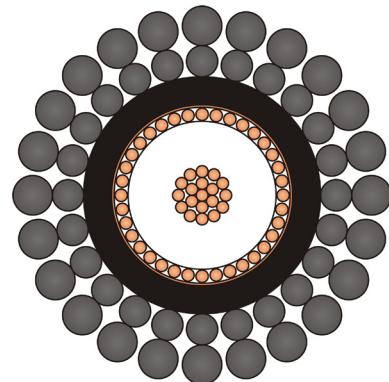

ELECTRICAL AND PHYSICAL CHARACTERISTICS

~ Resistance of inner conductor	Max 9,8 ohm/km
~ Resistance of outer conductor	Max 6,9 ohm/km
~ Voltage rating	Max 1900 Vdc
~ Weight in air nom.	460 kg/km
~ Weight in fresh water nom.	356 kg/km
~ Weight in sea water nom. (s.g. 1,026)	353 kg/km
~ Breaking strength	71,2 kN
~ Working load max.	17,8 kN
~ Recommended static bending radius min.*	115 mm
~ Recommended dynamic bending radius min.*	230 mm
~ Working temperature	-30/+80 °C
~ Characteristics Impedance @ 1 MHz	40 ohm
~ Nominal capacitance	131 pF/m

KEY FEATURES

- ~ Preformed armour
- ~ Tow cable
- ~ Coaxial cable

** Failure to comply with the minimum recommended bending radius can compromise long-term durability and overall product performance.*

AQUANCABLE®